AT/ATR-MS SERIES
AC Current Transducers



AT/ATR-MS Series Current Transducers combine a current sensing element and signal conditioner into a single package. The large, easy-to-install split-core design allows for installation over existing conductors without the need to disconnect the load, even in applications where there are multiple conductors per phase. Whether installing over existing conductors or in a new control system, installation is very simple and quick. Just remove the top portion of the sensing ring, place the conductors inside, and snap the top back in place. The transducer uses two wires to connect to the power supply and the load (a programmable logic controller, a panel meter, or a data acquisition system).


AC Current Transducer Applications

Monitor Large Machines
- Measure the current use to detect over or undercurrent conditions before they cause break downs.

Water Delivery and Treatment
- Detect open discharge lines.
- Locate clogged filters or blocked intake to pumps.

Grinding and Shredding
- An analog output will allow the control system designer to allow brief periods of drive overload when the processed product varies in density. If the blades hit something foreign (e.g. steel when the machine is designed to reduce paper), then the control will alarm or shut down the process.

Shredder Monitoring

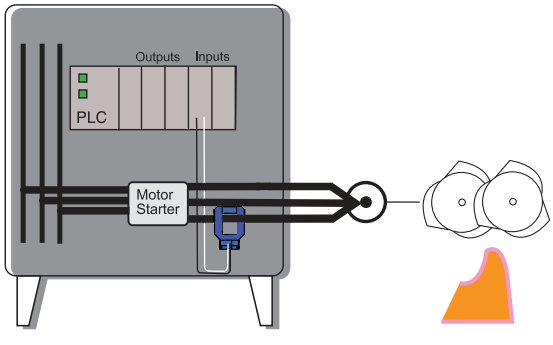

For additional Application Examples,

AC Current Transducer Features

Industry Standard Output
- 4–20 mA signal proportional to the AC current.
- Compatible with most automation systems.

Loop-powered
- Use the "live zero" output to verify proper connections, where the sensor output is 4 mA with no current through the sensing ring.

Factory Calibrated
- Eliminates zero and span potentiometer adjustment.

Split-core Case
- Sensing window provides ample space for bus bar, single or multiple conductors.


DIN Rail Mounted Case*
- Simply snaps onto DIN rail for secure mounting.

UL/cUL and CE Approved
- Accepted worldwide.

*For information on the DIN rail accessories kit, see page 147.

AC Current Transducer Connections

Single Transducer Installation

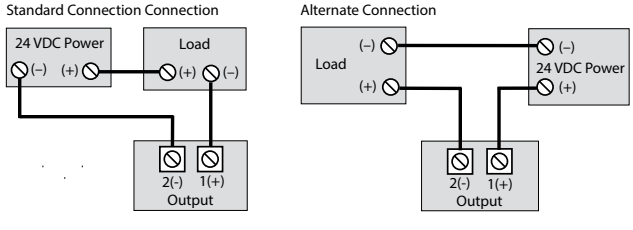



OEMs **Test & Evaluation Units for OEMs**
Free program expedites evaluation process. See page 3 for details.

NK Technologies

AC Current Transducer Dimensions

MS Case

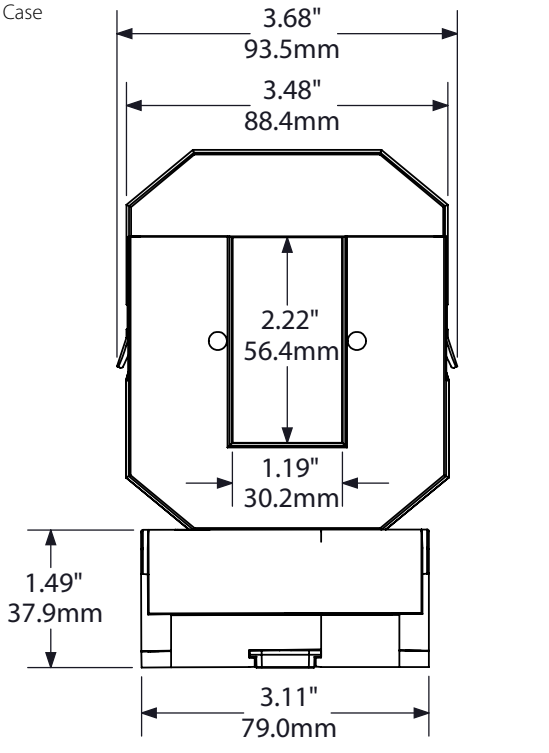

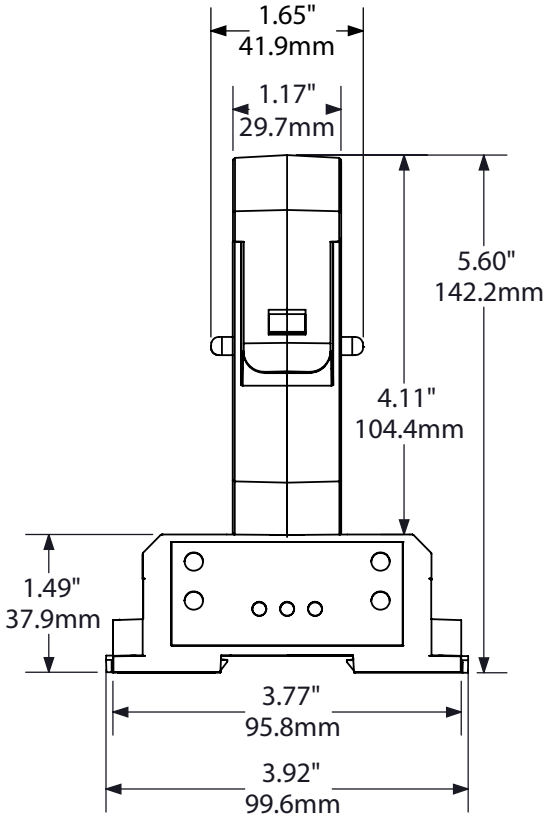

Note: Drawings are not to scale

AC Current Transducer Specifications

Power Supply	24 VDC nominal (12–32 VDC)
Output Signal	4–20 mA loop-powered, average or True RMS
Output Limit	23 mA
Output Loading	660 Ω @ 24 VDC
Accuracy	1.0% FS
Response Time	600 ms (90% step change)
Input Range	2: 0–200 A 3: 0–300 A 4: 0–400 A 6: 0–600 A 8: 0–800 A
Frequency Range	• AT: 50/60 Hz (average responding) • ATR: 20–400 Hz (True RMS responding)
Isolation Voltage	UL listed to 2200 VAC
Case	UL94 V-0 Flammability Rated
Environmental	-4 to 122°F (-20 to 50°C) 0–95% RH, non-condensing
Listings	UL/cUL, CE

AC Current Transducer Ordering Information

Sample Model Number: ATR6-420-24L-MS

AC current transducer, 0–600 A range, True RMS output 4–20 mA, loop-powered, medium split-core case, DIN rail mounting.

	(1)	(2)		(3)				(4)				(5)	
AT			–	**4**	**2**	**0**	–	**2**	**4**	**L**	–	**M**	**S**

(1) Measurement

	Average responding output signal (blank)
R	True RMS responding output for distorted current

(2) Range

2	0–200 A
3	0–300 A
4	0–400 A
6	0–600 A
8	0–800 A

(3) Output Type

420	4–20 mA

(4) Power Supply

24L	24 VDC Loop-powered

(3) Case Style

MS	Split-core, base terminals, DIN rail mounting