

# SINEAX V 608, Programmable Two-wire Temperature Transmitter for RTD and TC Inputs

for rail mounting in housing K17



## Application

**SINEAX V 608** is a two-wire transmitter. It is designed for **measuring temperature in combination with thermocouples or resistance thermometers**. Thermocouple non-linearities are automatically compensated. The output signal is a current in the range 4...20 mA.

The input variable and measuring range are programmed with the aid of a PC and the corresponding software.

The sensor circuit is monitored for open and short-circuits and the output responds in a defined manner if one is detected.

The power supply (12...30 V DC) is connected together with the signal by the two leads connected to the measurement output (loop powered).

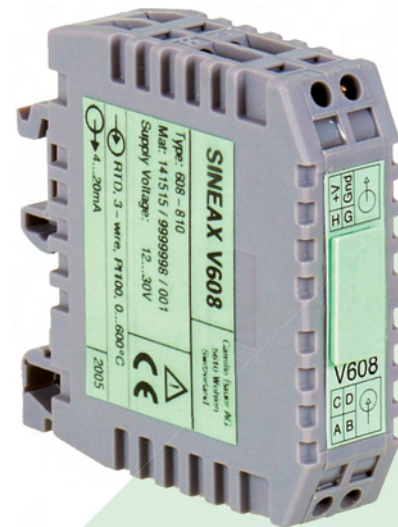


Fig. 1. Measuring transmitter SINEAX V 608 in housing K17.

## Features / Benefits

- **Input variable and measuring range programmed using PC / Simplifies project planning and engineering, short delivery times, low stocking levels**

Measured variables	Measuring ranges		
	Limits	Min. span	Max. span
Temperatures with resistance thermometers for <b>two, three</b> or <b>four</b> wire connection			
Pt100, IEC 60 751	- 200 to 850 °C	50 K	850 K
Ni100, DIN 43 760	- 60 to 250 °C	50 K	250 K
Temperatures with thermocouples			
Type B, E, J, K, N, R, S, T acc. to IEC 60 584-1	acc. to type	2 mV	80 mV
Type L and U, DIN 43 710			
Type W5 Re/W26 Re Type W3 Re/W25 Re acc. to ASTM E 988-90			

- **Two-wire transmitter for installation in the process environment**
- **Open and short-circuit sensor circuit supervision / Defined output response should the supervision pick-up**
- **Programmable with or without power supply connection**
- **Compact design / Makes maximum use of available space**
- **Available in type of protection "Intrinsic safety" EEx ia IIC T6 (see "Table 5: Data on explosion protection")**

## Standard versions

The following versions are available as standard versions already programmed for the **basic** configuration. It is only necessary to quote the **Order No.:**

Table 1:

Version	Cold junction compensation	Order Code	Order No.
Standard, not electrically isolated	incorporated	608-810	141 515
EEx ia IIC T6, not electrically isolated		608-830	141 523

Please complete the Order Code 608-8.1. .... according to "Table 3: Specification and ordering information" for versions with user-specific input ranges.

## Basic configuration:

Measuring input	Pt 100 for <b>three</b> -wire connection
Measuring range	0 ... 600 °C
Measuring output	4 ... 20 mA, linearised with temperature
Open-circuit supervision	Output 21.6 mA
Response time	Approx. 1.5/2 s (Table 2)
Mains ripple suppression	For frequency 50 Hz

# SINEAX V 608, Programmable Two-wire Temperature Transmitter for RTD and TC Inputs

## Programming

A PC, the programming cable PK 610 plus ancillary cable and the programming software V 600 *plus* are required to program the transmitter. (Details of the programming cable and the software are in be found in the separate data sheet: PK 610 Le.)

The connections between "PC ↔ PK 610 ↔ SINEAX V 608" can be seen from Fig. 2. The transmitter can be programmed either with or without the power supply connected.

The software V 600 *plus* is supplied on one CD and runs under Windows 3.1x, 95, 98, NT and 2000.

The programming cable PK 610 adjusts the signal level between the PC and the transmitter SINEAX V 608.

**The programming cable PK 610 is used for programming both standard and Ex versions.**

It is possible to programme the temperature transmitter installed into the hazardous area.

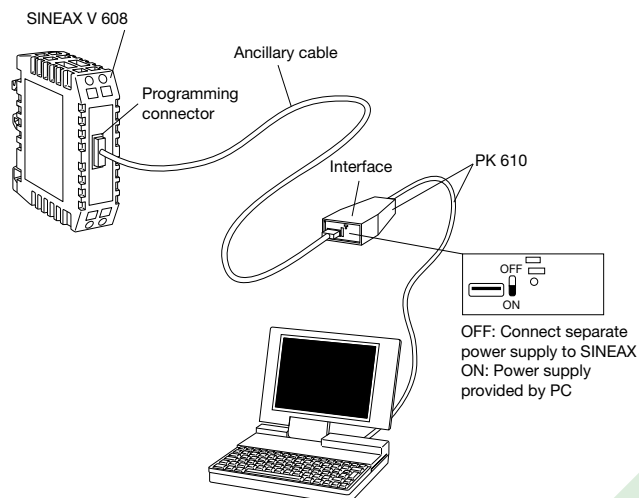


Fig. 2. Example of the set-up for programming a SINEAX V 608 without the power supply. For this case the switch on the interface must be set to "ON".

## Technical data

### Measuring input $\rightarrow$

#### Temperature with resistance thermometers

Measuring range limits:	See table 4
Resistance types:	Type Pt 100 (IEC 60 751) Type Ni 100 (DIN 43 760) other sensor types configurables
Measuring current:	$\leq 0.20$ mA
Standard circuit:	1 resistance thermometer for <b>two-, three- or four-wire</b> connection
Input resistance:	$R_i > 10$ M $\Omega$
Lead resistance:	$\leq 30$ $\Omega$ per lead

#### Temperature with thermocouple

Measuring range limits:	See Table 4
Thermocouple pairs:	Type B: Pt30Rh-Pt6Rh (IEC 584) Type E: NiCr-CuNi (IEC 584) Type J: Fe-CuNi (IEC 584) Type K: NiCr-Ni (IEC 584) Type L: Fe-CuNi (DIN 43710) Type N: NiCrSi-NiSi (IEC 584) Type R: Pt13Rh-Pt (IEC 584) Type S: Pt10Rh-Pt (IEC 584) Type T: Cu-CuNi (IEC 584) Type U: Cu-CuNi (DIN 43710) Type W5 Re/W26 Re (ASTM) Type W3 Re/W25 Re E 988-90

Standard circuit:	1 thermocouple, <b>internal</b> cold junction compensation with built-in Pt 100 or 1 thermocouple, <b>external</b> cold junction compensation
-------------------	---

Input resistance:  $R_i > 10$  M $\Omega$

### Cold junction compensation:

Internal:	Internal or external With built-in Pt 100 or with Pt 100 connected to the terminals
External:	Via cold junction thermostat 0 ... 60 °C, configurable


### Measuring output $\rightarrow$

Output signal $I_A$ :	(output/powering circuit) Impressed DC current, <b>linear with temperature</b>
Standard range:	4...20 mA, 2-wire technique

External resistance (load):

$$R_{\text{ext max.}} [\text{k}\Omega] = \frac{\text{Power supply [V]} - 12 \text{ V}}{\text{Max. output current [mA]}}$$

Load max. [ $\Omega$ ] with 20 mA output

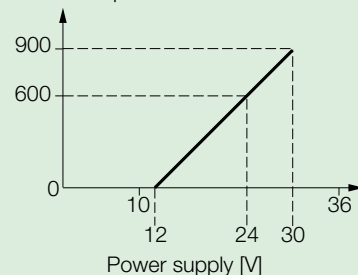

Residual ripple in output current:  $< 1\%$  p.p.

# SINEAX V 608, Programmable Two-wire Temperature Transmitter for RTD and TC Inputs

Table 2: Response time

Measuring mode	Open sensor circuit	Short-circuit	Possible response times approx. [s]						
			*)	Option					
TC int. comp.	aktive	—	1.5	2.5	3.5	6.5	11	20.5	40
TC int. comp.	off	—	1.5	2.5	3.5	6.5	13.5	24.5	49.5
TC ext. comp.	aktive	—	1.5	2.5	3.5	6.5	11	20.5	40
TC ext. comp.	off	—	1.5	2.5	4	6.5	13.5	24.5	48.5
RTD 2L	aktive	—	2	2.5	3	5	9.5	17.5	33.5
RTD 3L, 4L	aktive	aktive	2	2.5	4	6.5	11.5	21	40.5
RTD 2L,3L,4L	off	off	1.5	2.5	3.5	7.5	14	26.5	50.5

\*) Standard values, also valid for basic configuration

## Programming connector

Interface: Serial interface

## Accuracy data (acc. to EN/IEC 60 770-1)

Reference value: Measuring span

Basic accuracy: Error limits  $\leq \pm 0.2\%$  at reference conditions

## Reference conditions

Ambient temperature 23 °C  
 Power supply 18 V DC  
 Output burden 250  $\Omega$   
 Settings Pt100, 3-wire, 0...600 °C

## Additional errors (additive)

### Low measuring ranges

Voltage measurement  $\pm 5 \mu\text{V}$   
 at measuring spans  $< 10 \text{ mV}$   
 Resistance thermometer  $\pm 0.3 \text{ K}$   
 at measuring spans  $< 400 \text{ }^\circ\text{C}$

### Thermocouple

Type U, T, L, J, K, E  $\pm 0.1 \text{ K}$   
 at measuring spans  $< 200 \text{ }^\circ\text{C}$   
 Type N  $\pm 0.13 \text{ K}$   
 at measuring spans  $< 320 \text{ }^\circ\text{C}$   
 Type S, R  $\pm 0.42 \text{ K}$   
 at measuring spans  $< 1000 \text{ }^\circ\text{C}$   
 Type B  $\pm 0.6 \text{ K}$   
 at measuring spans  $< 1400 \text{ }^\circ\text{C}$

### High initial value

(Additional error =  
 Factor · initial value)

Voltage measurement  $\pm 0.1 \mu\text{V} / \text{mV}$   
 Resistance thermometer  $\pm 0.00075 \text{ K} / \text{ }^\circ\text{C}$   
 Thermocouple  
 Type U, T, L, J, K, E  $\pm 0.0006 \text{ K} / \text{ }^\circ\text{C}$   
 Type N  $\pm 0.0008 \text{ K} / \text{ }^\circ\text{C}$   
 Type S, R  $\pm 0.0025 \text{ K} / \text{ }^\circ\text{C}$   
 Type B  $\pm 0.0036 \text{ K} / \text{ }^\circ\text{C}$

Influence of lead resistance  
 at resistance thermometer  $\pm 0.01\%$  per  $\Omega$

Internal cold junction  
 compensation  $\pm 0.5 \text{ K}$

Linearisation  $\pm 0.3\%$

## Influencing factors

Temperature  $\leq \pm (0.15\% + 0.15 \text{ K})$  per 10 K with  
 temperature measurement  
 $\leq \pm (0.15\% + 12 \mu\text{V})$  per 10 K with  
 voltage measurement

Power supply influence  
 (power supply on terminals)  $\leq \pm 0.005\%$  per V

Long-time drift  $\leq \pm 0.1\%$

Common and transverse  
 mode influence  $\leq \pm 0.2\%$

## Open and short-circuit sensor circuit supervision

Signalling modes: Output signal programmable to  
 ... the value the output had im-  
 mediately prior to the open or  
 short-circuit (hold value)  
 ... a value between  
 4 and 21.6 mA

## Power supply

DC voltage: Supply  
 12...30 V DC  
 max. residual ripple 1% p.p.  
 (supply must not fall below 12 V)  
 Protected against wrong polarity

## Installation data

Housing: Housing K17 for rail mounting  
 Dimensions see section "Dimensio-  
 nal drawings"

Material of housing: Polyamide  
 Flammability Class V2 acc. to UL  
 94, self-extinguishing, non-dripping,  
 free of halogen

Mounting: For snapping  
 – onto rail G  
 acc. to EN 50 035 – G32  
 or  
 – onto top-hat rail  
 acc. to EN 50 022 (35 x 15 mm  
 or 35 x 7.5 mm)

## Standards

Electromagnetic  
 compatibility: The standards EN 50 081-2 and  
 EN 50 082-2 are observed

Intrinsically safe: Acc. to EN 50 020

Protection (acc. to IEC 529  
 resp. EN 60 529): Housing IP 40  
 Terminals IP 20

# SINEAX V 608, Programmable Two-wire Temperature Transmitter for RTD and TC Inputs

Electrical standards:	Acc. to IEC 1010 resp. EN 61 010	Storage temperature range:	-40 to +80 °C
<b>Ambient conditions</b>		Annual mean relative humidity:	≤ 75%, no moisture condensation
Climatic rating:	IEC 60 068-2-1/2/3		
Ambient temperature range:	-25 to +80 °C at NEx and Ex (T4) at Ex (T6) dependent of Pi, see EC-type-examination Certificate		

**Table 3: Specification and ordering information** (see also Table 1: Standard versions)

Description	*Blocking code	No-go with blocking code	Article No./ Feature
<b>SINEAX V 608</b>			608 –
<b>Order Code V 608 - xxxx xxxx xxx</b>			
<b>Features, Selection</b>			
<b>1. Housing</b> Housing K17 for rail mounting			8
<b>2. Version</b> Standard, not electrically isolated			1
EEx ia IIC T6, not electrically isolated			3
<b>3. Configuration</b> Basic configuration, programmed (Pt100, three-wire, 0 ... 600 °C) All types with basic configuration are available as standard versions, see table 1, specification complete! Programmed to order The following features 4 to 11 must be fully specified!	G		0
			1
<b>4. Measuring unit</b> Temperatures in °C			1
Temperatures in °F		G	2
Temperatures in K		G	3
<b>5. Measuring mode, input connection</b> <b>Thermocouple</b> Internal cold junction compensation, with built-in Pt100	T	G	1
External cold junction compensation $t_k$ [ ]	T	G	2
Specify external cold junction temperature $t_k$ (in °C, °F or K, acc. to specification in Feature 4) any value between 0 and 60 °C or equivalent			
<b>Resistance thermometer</b> Two-wire connection, $R_L$ [Ω] [ ]	R	G	3
Specify total lead resistance $R_L$ [Ω], any value between 0 and 60 Ω			
Three-wire connection, $R_L \leq 30 \Omega/\text{wire}$	R		4
Four-wire connection, $R_L \leq 30 \Omega/\text{wire}$	R	G	5
<b>6. Sensor type / measuring range</b> Sensor type / beginning ... end value of measuring range			
RTD PT 100 Range [ ]		T	1
RTD Ni 100 Range [ ]		GT	2
RTD Pt ... [Ω] Range [ ]		GT	3
RTD Ni ... [Ω] Range [ ]		GT	4

# SINEAX V 608, Programmable Two-wire Temperature Transmitter for RTD and TC Inputs

Description	*Blocking code	No-go with blocking code	Article No./ Feature
<b>SINEAX V 608</b> <span style="float: right;"><b>Order Code V 608 - xxxx xxxx xxx</b></span>			608 –
<b>Features, Selection</b>			
<b>6. Sensor type / measuring range (continuation)</b>			
Sensor type / beginning ... end value of measuring range			
TC Type B	Range		GR B
TC Type E	Range		GR E
TC Type J	Range		GR J
TC Type K	Range		GR K
TC Type L	Range		GR L
TC Type N	Range		GR N
TC Type R	Range		GR R
TC Type S	Range		GR S
TC Type T	Range		GR T
TC Type U	Range		GR U
TC W5-W26Re	Range		GR W
TC W3-W25Re	Range		GR X
Specify measuring range in [°C], [°F] or [K]; refer to table 4 for the operating limits for each type of sensor. Lines 3 and 4: Specify resistance in $\Omega$ at 0 °C, any value between 50 and 4000 $\Omega$			
<b>7. Output characteristic</b>			
Standard 4 ... 20 mA			
Inversely 20 ... 4 mA			
<b>8. Open and short-circuit sensor signalling</b>			
Output response for an open or short-circuit* sensor			
Output 21.6 mA			
Output (any value between 4 and < 21.6 mA)	[mA]		G 1
Hold output at last value			
No signal			
* The short-circuit signal is only active for the RTD measuring mode $\geq 100 \Omega$ at 0 °C and three or four-wire connection			
<b>9. Output time response</b>			
Standard setting time approx. 2 s			
Setting time (admissible values see Table 2)	[s]		G 9
<b>10. Mains ripple suppression</b>			
Frequency 50 Hz			
Frequency 60 Hz			
<b>11. Test certificate</b>			
Without test certificate			
Test certificate in German			
Test certificate in English			

\*Lines with letter(s) under "no-go" cannot be combined with preceding lines having the same letter under "SCODE".

# SINEAX V 608, Programmable Two-wire Temperature Transmitter for RTD and TC Inputs

**Table 4: Temperature measuring ranges**

Measuring ranges [°C]	Resistance thermometers		Thermocouples											
	Pt100	Ni100	B	E	J	K	L	N	R	S	T	U	C <sup>1)</sup>	D <sup>2)</sup>
0 ... 40	X			X	X		X							
0 ... 50	X	X		X	X	X	X				X	X		
0 ... 60	X	X		X	X	X	X				X	X		
0 ... 80	X	X		X	X	X	X	X			X	X		
0 ... 100	X	X		X	X	X	X	X			X	X		
0 ... 120	X	X		X	X	X	X	X			X	X		
0 ... 150	X	X		X	X	X	X	X			X	X	X	
0 ... 200	X	X		X	X	X	X	X			X	X	X	X
0 ... 250	X	X		X	X	X	X	X			X	X	X	X
0 ... 300	X			X	X	X	X	X	X	X	X	X	X	X
0 ... 400	X			X	X	X	X	X	X	X	X	X	X	X
0 ... 500	X			X	X	X	X	X	X	X		X	X	X
0 ... 600	X			X	X	X	X	X	X	X		X	X	X
0 ... 800	X		X	X	X	X	X	X	X	X			X	X
0 ... 900			X	X	X	X	X	X	X	X			X	X
0 ... 1000			X	X	X	X		X	X	X			X	X
0 ... 1200			X		X	X		X	X	X			X	X
0 ... 1500			X						X	X			X	X
0 ... 1600			X						X	X			X	X
0 ... 1800			X										X	X
0 ... 2000													X	X
50 ... 150	X	X		X	X	X	X	X			X	X		
100 ... 300	X			X	X	X	X	X			X	X	X	X
200 ... 500	X			X	X	X	X	X	X	X		X	X	X
300 ... 600	X			X	X	X	X	X	X	X		X	X	X
600 ... 900			X	X	X	X	X	X	X	X			X	X
600 ... 1000			X	X	X	X		X	X	X			X	X
900 ... 1200			X		X	X		X	X	X			X	X
600 ... 1600			X						X	X			X	X
600 ... 1800			X										X	X
-10 ... 40	X	X		X	X	X	X					X		
-30 ... 60	X	X		X	X	X	X	X			X	X		
Measuring range limits [°C]	-200 to 850	-60 to 250	0 to 1820	-270 to 1000	-210 to 1200	-270 to 1372	-200 to 900	-270 to 1300	-50 to 1769	-50 to 1769	-270 to 400	-200 to 600	0 to 2315	0 to 2315
	$\Delta R$ min. 15 $\Omega$ at final value <sup>3)</sup> $\leq 400 \Omega$ $\Delta R$ min. 150 $\Omega$ at final value $> 400 \Omega$ max. final value 4000 $\Omega$ $\frac{\text{initial value}}{\Delta R} \leq 10$		$\Delta U$ min 2 $\Delta R$ , max. 80 mV  $\frac{\text{Initial value}}{\Delta U} \leq 10$											

<sup>1)</sup> W5 Re W26 Re (ASTM E 988-90)

<sup>2)</sup> W3 Re W25 Re (ASTM E 988-90)

<sup>3)</sup> For two-wire connection, the final value is made up of the measured final value [ $\Omega$ ] plus the total resistance of the leads.

# SINEAX V 608, Programmable Two-wire Temperature Transmitter for RTD and TC Inputs



**Table 5: Data on explosion protection**  **II 2 (1) G**

Order code	Type of protection Marking	Electrical data cc. to Certificate		Certificate	Mounting location
		Sensor input	Output		
608-83	EEx ia IIC T6	$U_o = 6\text{ V}$ $I_o = 15\text{ mA}$ $P_o = 39\text{ mW}$ $C_o = 990\text{ nF}$ $L_o = 5\text{ mH}$	$U_i = 30\text{ V}$ $I_i = 160\text{ mA}$ $P_i = \text{max. } 1\text{ W}^*$ $C_i = 0$ $L_i = 0$	EC-type-examination Certificate ZELM 01 ATEX 0052	<b>Within</b> the hazardous area, zone 1 and 2**

\* Ambient temperature Ex:  $-25\text{ }^\circ\text{C}$  ... max.  $57\text{ }^\circ\text{C}$  (dependent on  $P_i$ , see EC-type-examination Certificate)

\*\* It is permissible for the sensor circuit to enter Zone 0, however, EN 50 284 and any applicable national standards must be observed.

**Table 6: Accessories and spare parts**

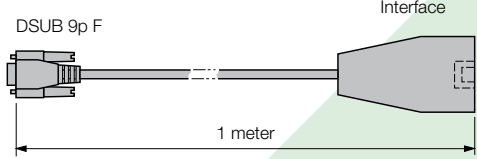
Description	Order No.
Programming cable PK 610 	137 887
Ancillary cable SINEAX Type V 608 	141 416
Configuration Software V 600 plus for SINEAX V 608, VK 616 and V 624 Windows 3.1x, 95, 98, NT and 2000 on CD in German, English, French, Spanish, Italian and Dutch <b>(download free of charge under <a href="http://www.camillebauer.com">http://www.camillebauer.com</a>)</b> In addition, the CD contains all configuration programmes presently available for Camille Bauer products	146 557
Operating Instructions V 608-8 Bd in German	141 953
Operating Instructions V 608-8 Bf in French	142 068
Operating Instructions V 608-8 Be in English	142 117

## Standard accessories

- 1 Operating Instructions in German, French and English
- 1 Type examination certificate (only for "intrinsically safe" explosion-proof devices)

# SINEAX V 608, Programmable Two-wire Temperature Transmitter for RTD and TC Inputs

## Electrical connections

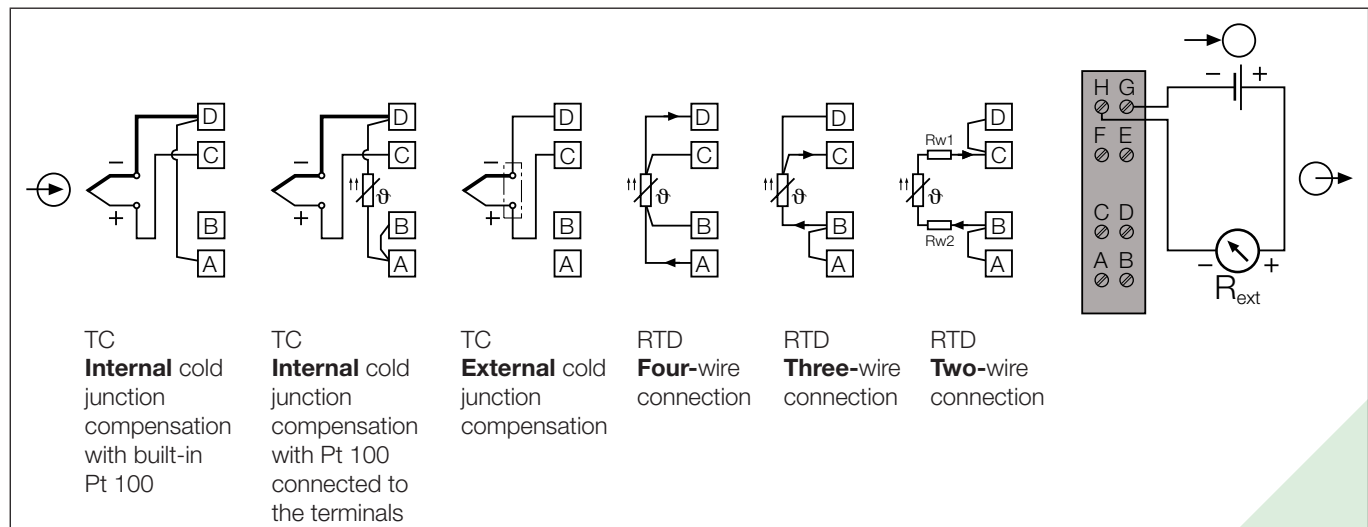

⊕ = Measuring input

⊕ = Two-wire measuring output (measuring circuit, 4 ... 20 mA signal)

⊕ = Power supply 12 ... 30 V DC

## Dimensional drawings

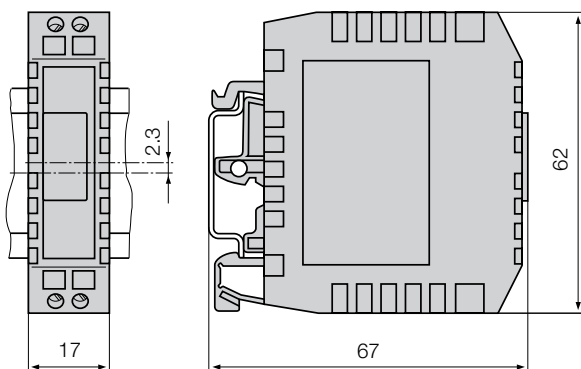


Fig. 3. SINEAX V 608 in housing **K17** clipped onto a top-hat rail EN 50 022 – 35 x 7.5.

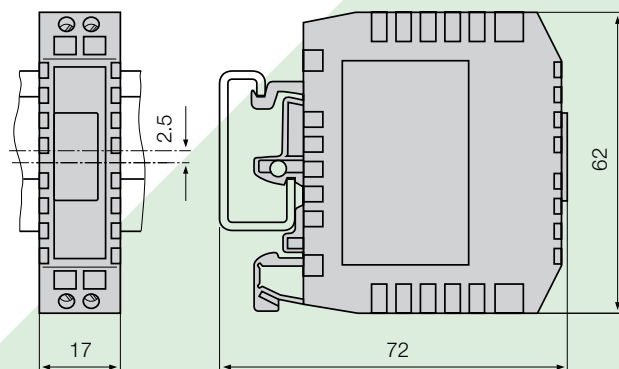


Fig. 4. SINEAX V 608 in housing **K17** clipped onto a rail "G" EN 50 035 – G32.

[www.mod-tronic.com](http://www.mod-tronic.com) | [sales@mod-tronic.com](mailto:sales@mod-tronic.com) | 1-800-794-5883