

SINEAX V 611

Programmable Temperature Transmitter

**Two-wire,
for RTD and TC inputs,
for rail mounting in housing K7**



Application

SINEAX V 611 is a two-wire transmitter. It is designed for **measuring temperature in combination with thermocouples or resistance thermometers**. Thermocouple non-linearities are automatically compensated. The output signal is a current in the range 4...20 mA.

The input variable and measuring range are programmed with the aid of a PC and the corresponding software.

The sensor circuit is monitored for open and short-circuits and the output responds in a defined manner if one is detected.

The power supply (12...30 V DC) is connected together with the signal by the two leads connected to the measurement output (loop powered).

Fig. 1. Measuring transmitter SINEAX V 611 in housing **K7** clipped onto a top-hat rail.

Features / Benefits

- Input variable and measuring range programmed using PC / Simplifies project planning and engineering, short delivery times, low stocking levels

Measured variables	Measuring ranges		
	Limits	Min. span	Max. span
Temperatures with resistance thermometers for two, three or four-wire connection			
Pt 100, IEC 60 751	– 200 to 850 °C	50 K	850 K
Ni 100, DIN 43 760	– 60 to 250 °C	50 K	250 K
Temperatures with thermocouples			
Type B, E, J, K, N, R, S, T acc. to IEC 60 584-1	acc. to type	2 mV	80 mV
Type L and U, DIN 43 710			
Type W5 Re/W26 Re, Type W3 Re/W25 Re acc. to ASTM E 988-90			

- Two-wire transmitter for installation in the process environment
- Open and short-circuit sensor circuit supervision / Defined output response should the supervision pick up
- Programmable with or without power supply connection
- Compact design (housing only 7 mm wide) / Makes maximum use of available space

Standard versions

The following version is available as standard version already programmed for the **basic** configuration. It is only necessary to quote the **Order No.:**

Table 1:

Version	Order Code	Order No
Standard, not electrically isolated, cold junction compensation incorporated	611-K0	152 504

Basic configuration:	Measuring input:	Pt 100 for three-wire connection
	Measuring range:	0 ... 600 °C
	Measuring output:	4 ... 20 mA, linearised with temperature
	Open-circuit supervision:	Output 21.6 mA
	Response time:	Approx. 2 s (Table 2)
	Mains ripple suppression:	For frequency 50 Hz

Please complete the Order Code 611-K1.. according to "Table 3: Specification and ordering information" for versions with user-specific input ranges.

SINEAX V 611

Programmable Temperature Transmitter

Programming

A PC, the programming cable PK 610 plus ancillary cable and the programming software V 600 *plus* are required to program the transmitter. (Details of the programming cable and the software are to be found in the separate data sheet: PK 610 Le.)

The connections between "PC ↔ PK 610 ↔ SINEAX V 611" can be seen from Fig. 2. The transmitter can be programmed either with or without the power supply connected.

The software V 600 *plus* is supplied on one CD and runs under Windows 95/NT or higher.

The programming cable PK 610 adjusts the signal level between the PC and the transmitter SINEAX V 611.

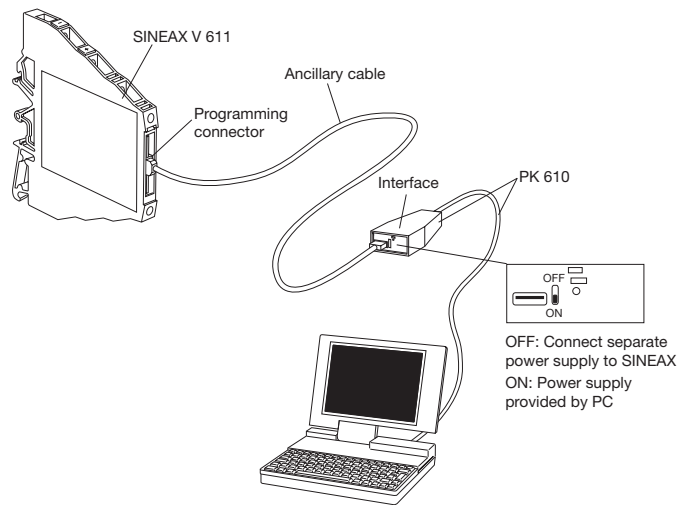


Fig. 2. Example of the set-up for programming a SINEAX V 611 without the power supply. For this case the switch on the interface must be set to "ON".

Technical data

Measuring input →

Temperature with resistance thermometers

Resistance types:	Type Pt 100 (IEC 60 751) Type Ni 100 (DIN 43 760) other sensor types configurables
Measuring current:	≤ 0.20 mA
Standard circuit:	1 resistance thermometer for two, three or four -wire connection
Input resistance:	$R_i > 10 \text{ M}\Omega$
Lead resistance:	≤ 30 Ω per lead

Temperature with thermocouple

Thermocouple pairs:	Type B: Pt30Rh-Pt6Rh (IEC 584) Type E: NiCr-CuNi (IEC 584) Type J: Fe-CuNi (IEC 584) Type K: NiCr-Ni (IEC 584) Type L: Fe-CuNi (DIN 43710) Type N: NiCrSi-NiSi (IEC 584) Type R: Pt13Rh-Pt (IEC 584) Type S: Pt10Rh-Pt (IEC 584) Type T: Cu-CuNi (IEC 584) Type U: Cu-CuNi (DIN 43710) Type W5 Re/W26 Re (ASTM) Type W3 Re/W25 Re (E 988-90)
Standard circuit:	1 thermocouple, internal cold junction compensation with built-in Pt 100 or 1 thermocouple, external cold junction compensation
Input resistance:	$R_i > 10 \text{ M}\Omega$


Cold junction compensation:

Internal:	Internal or external With built-in Pt 100 or with Pt 100 connected to the terminals
External:	Via cold junction thermostat 0 ... 60 °C, configurable

Measuring output →

Output signal I_A :	(output/powering circuit) Impressed DC current, linear with temperature
Standard range:	4...20 mA, 2-wire technique
External resistance (load):	$R_{\text{ext max.}} [\text{k}\Omega] = \frac{\text{Power supply [V]} - 12 \text{ V}}{\text{Max. output current [mA]}}$

Load max. [Ω] with
20 mA output



Residual ripple in output current:	< 1% p.p.
------------------------------------	-----------

SINEAX V 611

Programmable Temperature Transmitter

Table 2: Response time

Measuring mode	Open sensor circuit	Short-circuit	Possible response times approx. [s]							
			*)	Option						
TC int. comp.	active	—	1.5	2.5	3.5	6.5	11	20.5	40	
TC int. comp.	off	—	1.5	2.5	3.5	6.5	13.5	24.5	49.5	
TC ext. comp.	active	—	1.5	2.5	3.5	6.5	11	20.5	40	
TC ext. comp.	off	—	1.5	2.5	4	6.5	13.5	24.5	48.5	
RTD 2L	active	—	2	2.5	3	5	9.5	17.5	33.5	
RTD 3L, 4L	active	active	2	2.5	4	6.5	11.5	21	40.5	
RTD 2L,3L,4L	off	off	1.5	2.5	3.5	7.5	14	26.5	50.5	

*) Standard values, also valid for basic configuration

Programming connector

Interface: Serial interface

Accuracy data (acc. to EN/IEC 60 770-1)

Reference value: Measuring span

Basic accuracy: Error limits $\leq \pm 0.2\%$ at reference conditions

Reference conditions

Ambient temperature 23 °C

Power supply 18 V DC

Output burden 250 Ω

Settings Pt100, 3-wire, 0...600 °C

Additional errors (additive)

Low measuring ranges

Voltage measurement $\pm 5 \mu\text{V}$ at measuring spans < 10 mV

Resistance thermometer $\pm 0.3 \text{ K}$ at measuring spans < 400 °C

Thermocouple

Type U, T, L, J, K, E $\pm 0.1 \text{ K}$ at measuring spans < 200 °C

Type N $\pm 0.13 \text{ K}$ at meas. spans < 320 °C

Type S, R $\pm 0.42 \text{ K}$ at meas. spans < 1000 °C

Type B $\pm 0.6 \text{ K}$ at meas. spans < 1400 °C

High initial value (Additional error = Factor · Initial value)

Factor

Voltage measurement $\pm 0.1 \mu\text{V} / \text{mV}$

Resistance thermometer $\pm 0.00075 \text{ K} / ^\circ\text{C}$

Thermocouple

Type U, T, L, J, K, E $\pm 0.0006 \text{ K} / ^\circ\text{C}$

Type N $\pm 0.0008 \text{ K} / ^\circ\text{C}$

Type S, R $\pm 0.0025 \text{ K} / ^\circ\text{C}$

Type B $\pm 0.0036 \text{ K} / ^\circ\text{C}$

Influence of lead resistance at resistance thermometer $\pm 0.01\%$ per Ω

Internal cold junction compensation $\pm 0.5 \text{ K}$

Linearisation $\pm 0.3\%$

Influencing factors

Temperature $\leq \pm (0.15\% + 0.15 \text{ K})$ per 10 K with temperature measurement
 $\leq \pm (0.15\% + 12 \mu\text{V})$ per 10 K with voltage measurement

Power supply influence (power supply on terminals) $\leq \pm 0.005\%$ per V

Long-time drift $\leq \pm 0.1\%$

Common and transverse mode influence $\leq \pm 0.2\%$

Open and short-circuit sensor circuit supervision

Signalling modes: Output signal programmable to ...
 ... the value the output had immediately prior to the open or short-circuit (hold value)
 ... a value between 4 and 21.6 mA

Power supply →○

DC voltage: Supply
 12...30 V DC
 max. residual ripple 1% p.p.
 (supply must not fall below 12 V)
 Protected against wrong polarity

Installation data

Housing: Housing K7 for rail mounting
 Dimensions see section "Dimensional drawings"

Material of housing: Polyamide
 Flammability Class V2 acc. to UL 94, self-extinguishing, non-dripping, free of halogen

Mounting: For snapping
 – onto rail G
 acc. to EN 50 035 – G32
 or
 – onto top-hat rail
 acc. to EN 50 022 (35 × 15 mm or 35 × 7.5 mm)

Standards

Electromagnetic compatibility: The standards EN 50 081-2 and EN 50 082-2 are observed

Protection (acc. to IEC 529 resp. EN 60 529): Housing IP 40
 Terminals IP 20

Electrical standards: Acc. to IEC 1010 resp. EN 61 010

SINEAX V 611

Programmable Temperature Transmitter

Ambient conditions		Storage temperature range:	– 40 to + 80 °C
Climatic rating:	IEC 60 068-2-1/2/3	Annual mean relative humidity:	≤ 75%, no moisture condensation
Ambient temperature range:	– 25 to + 55 °C		

Table 3: Specification and ordering information (see also Table 1: Standard versions)


Order Code 611 -												
Features, Selection	*SCODE	no-go										
1. Housing K) SINEAX in housing K7												
2. Configuration 0) Basic configuration programmed, (Pt 100, three-wire, 0 to 600 °C, 4 to 20 mA) 1) Configured to order Features 3 to 9 may only be given if “configured to order” (selection 1) is specified	G		K 0 1									
3. Measuring mode, input connection Thermocouple, linearised 1) Internal cold junction compensation, with built-in Pt 100 2) External cold junction compensation t_k [°C]	T	G	. . 1 2									
Resistance thermometer, linearised 3) Two-wire connection, R_L [Ω] 4) Three-wire connection 5) Four-wire connection Line 2: External cold junction temperature t_k between 0 and 60 °C Line 3: Total lead resistance R_L max. 60 Ω	R	G	. . 3 4 5									

Table 3: “Specification and ordering information” continued on next page!

SINEAX V 611

↑	↑	↑	↑	↑	↑						
1
2
3
4
B
E
J
K
L
N
R
S
T
U
W
X
.	0
.	1
.	.	0
.	.	1
.	.	2
.	.	A
.	.	.	1
.	.	.	9
.	.	.	.	0
.	.	.	.	1
.	0
.	D
.	E

* Lines with letter(s) under "no-go" cannot be combined with preceding lines having the same letter under "SCODE".

SINEAX V 611

Programmable Temperature Transmitter

Electrical connections

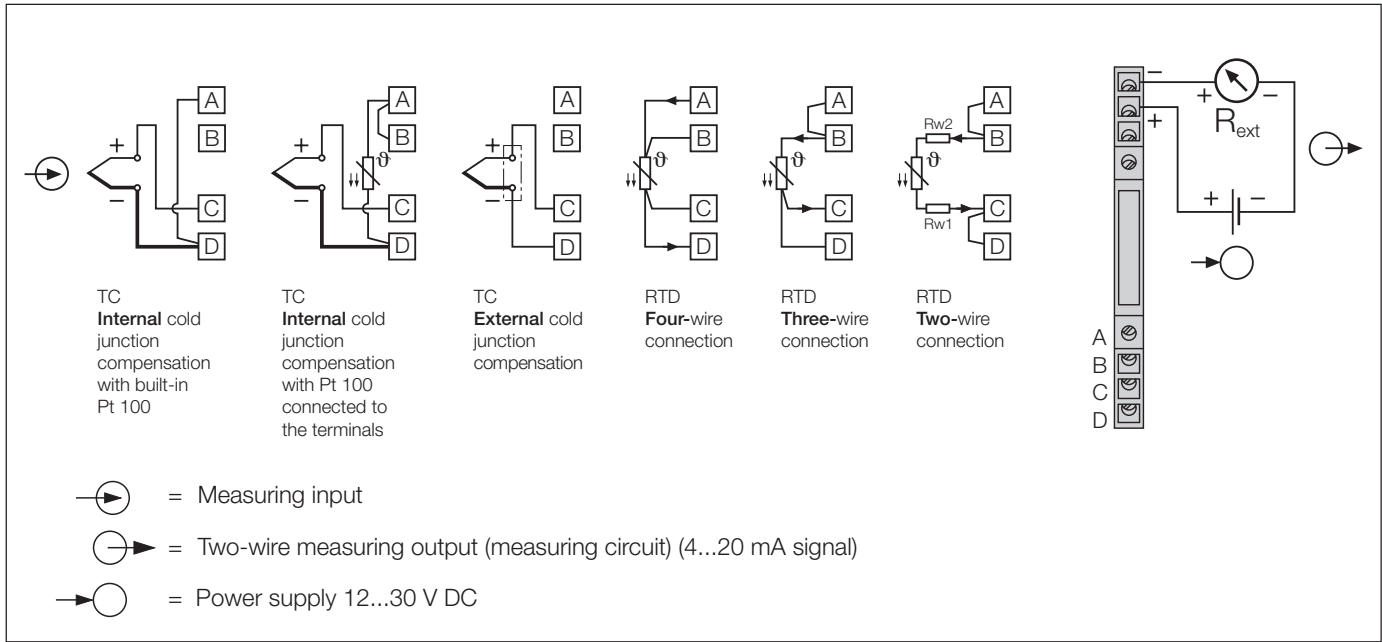


Table 4: Accessories and spare parts

Description		Order No.
Programming cable PK 610		137 887
Ancillary cable		141 440
Configuration Software V 600 <i>plus</i> * on CD in German, English, French, Spanish, Italian and Dutch Windows 95 or higher. The CD contains all configuration programmes presently available for Camille Bauer products		146 557
Operating Instructions V 611 Bd in German		152 471
Operating Instructions V 611 Bf in French		152 489
Operating Instructions V 611 Be in English		152 497

* Download free of charge under <http://www.camillebauerag.ch>

Standard accessories

- 1 Operating Instructions in German, French and English

SINEAX V 611

Programmable Temperature Transmitter

Dimensional drawings

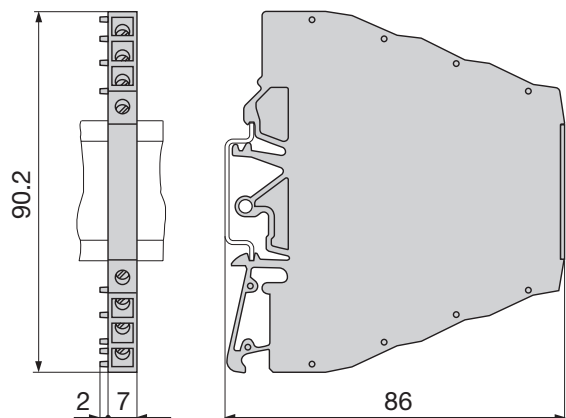


Fig. 3. SINEAX V 611 in housing **K7**
clipped onto a top-hat rail EN 50 022 – 35 x 7.5.

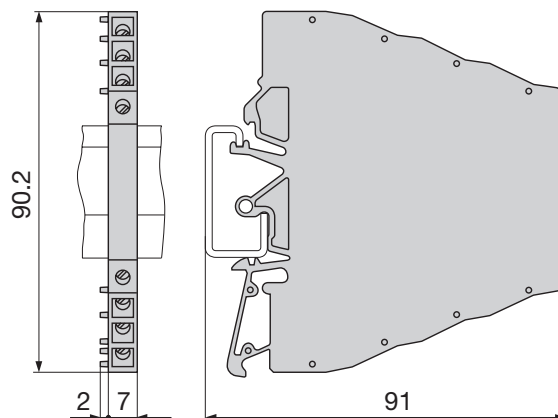


Fig. 4. SINEAX V 611 in housing **K7**
clipped onto a rail "G" EN 50 035 – G32.

www.mod-tronic.com | sales@mod-tronic.com | 1-800-794-5883