


RTD Extension Cable

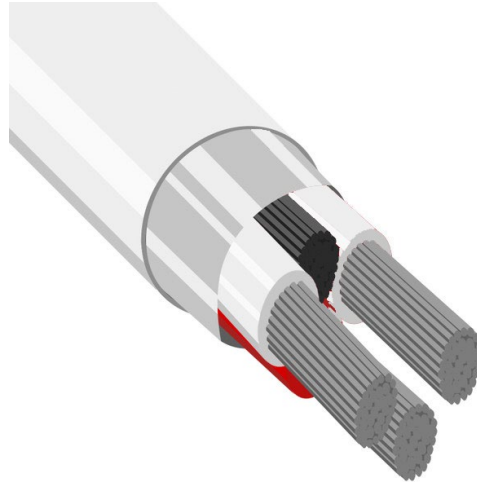

Specifications:

- **Voltage/Temperature:** 600 Volts, 200°C rated
- **Conductors:** 3 wires twisted, AWG 22 (19/34 AWG strands) Silver plated copper 0.030" nominal OD
- **Conductor Insulation:** PTFE Extruded 0.048" OD nominal per HP3-EXBFE
- **Conductors Insulation Colors:** Red/White/White
- **Drain wire:** Twisted with conductors, AWG 22 (19/34 AWG strands) Silver plated copper 0.030" nominal OD
- **Shield:** Kapton Foil
- **Overall Jacket:** PTFE tape, spiral wrapped, White, 0.128" REF OD

Part Numbers in stock:

MT-WCT322FSD-RWW100, 100 ft spool

MT-WCT322FSD-RWW250, 250 ft spool

MT-WCT322FSD-RWW500, 500 ft spool

Longer lengths available upon request

Other colour configurations, jackets, shielding and number of conductors also available.