
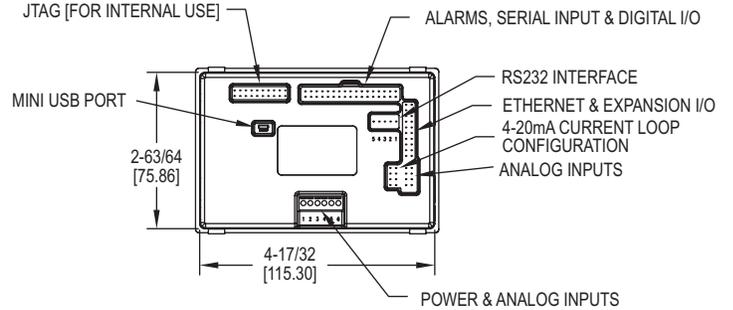


# GRAPHICAL USER INTERFACE PANEL METER

## 4.3" (109 mm) Touch Screen Display, Fully Customizable

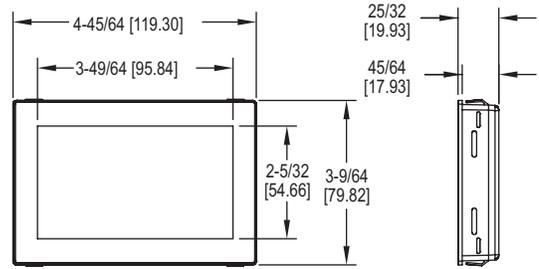

The **SERIES SPPM2** Graphical User Interface Panel Meter is a configurable, full-color 4.3" (109 mm) touch screen display that can be used in a variety of applications. By using the free Windows® based Interface Panel Design Studio software, users can personalize the display with buttons, switches, and analog and digital scales to suit their needs. A development kit is also available, which includes a development board with buttons, dials, LEDs, and screw terminals to test the functionality of all inputs and outputs.

### FEATURES/BENEFITS

- Large 4.3" touch screen display can be powered from USB or 5 to 30 VDC supply
- Free design software allows users to drag and drop elements onto the screen to quickly develop their specific interface
- Accepts up to 4 analog inputs, 8 digital I/O, 4 PWM outputs, and 2 open collector alarm outputs

### APPLICATIONS

- Lift station pump control
- Room condition monitoring display
- Walk-in refrigeration/freezer control


MODEL CHART	
Model	Description
SPPM2-43	4.3" interface panel
SPPM2-43-D	4.3" interface panel with development board

### SPECIFICATIONS

**Inputs:** Mini-USB, 6-line screw terminal analog, 4 x ±40 V, or 4 to 20 mA, 8 x digital I/O.  
**Outputs:** 4 x PWM, 2 x alarms (open collector).  
**Accuracy:** ±0.05% ±0.1 mV (typ).  
**Resolution:** 0.04 mV (max) or 4 decimal places.  
**Power Supply:** USB port or 5 to 30 VDC.  
**Current Consumption:** 400 mA at 5 VDC.  
**Display:** 4.3" (10.9 cm) TFT LCD with 262k colors.  
**Display Resolution:** 480 x 272 pixels.  
**Sampling Rate:** 10 samples/s.  
**Temperature Limits:** 32 to 104°F (0 to 40°C).  
**Warm Up:** 15 s.  
**Mounting:** Panel mount.  
**Electrical Connection:** Multi-pin DIL's, 1 mini-USB, and 1 RS232.  
**Software Requirements:** Compatible with Windows® 7, Windows® 8 and Windows® 10.  
**Weight:** 6.7 oz (181 g).  
**Approvals:** CE.

### DEVELOPMENT BOARD SPECIFICATIONS

**Inputs:** 4 x ±5 VDC.  
**Outputs:** 8 x digital I/O's, 4 x PWM outputs.  
**Serial Communication:** RS232.  
**Power Supply:** USB port or 5 to 30 VDC.  
**Weight:** 19.7 oz (560 g).

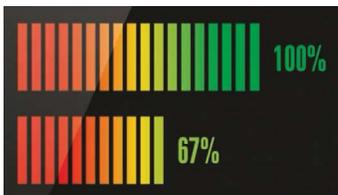

Windows® is a registered trademark of Microsoft Corporation.